


The standard provides up to 85% perceived noise reduction and 94% flow factor

- Expertly reduces Exponentially Perceived Noise (EPNdB) without impeding equipment performance
- Designed to take explosive air exhaust noise discharged from valve exhaust ports and muffle it with optimized Constant Velocity (CV) flow factor
- Exhaust air flows softly to atmosphere, free of noise, oil fog, and other contaminants – helping to maintain a clean, comfortable and productive work environment
- Features a unique obstruction-free expansion chamber, with corrosion-resistant aluminium end covers, zinc-plated steel components and a cellulose fibre element
- recommended for general purpose air exhaust applications for pressures up to 125 psi (8.6 Bar)

Single Chamber-Male 3/4" - 2"

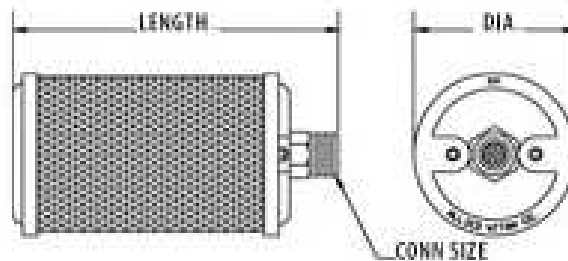

Conn Size	Male BSPT		Diameter	Length		Replacement element
	Model Type	Item number		Male	Female	
3/4"	A-B07	0121007	3.40	7.18	6.68	0911007
2"	A-B20	0121020	5.25	18.87	17.75	0911020